



Hewlett Packard
Enterprise

HPE Security ArcSight Logger Forwarding Connector for HPE NNMi

Software Version: 7.3.0.7837.0

Configuration Guide

August 30, 2016

Legal Notices

Warranty

The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

The information contained herein is subject to change without notice.

The network information used in the examples in this document (including IP addresses and hostnames) is for illustration purposes only.

HPE Security ArcSight products are highly flexible and function as you configure them. The accessibility, integrity, and confidentiality of your data is your responsibility. Implement a comprehensive security strategy and follow good security practices.

This document is confidential.

Restricted Rights Legend

Confidential computer software. Valid license from Hewlett Packard Enterprise required for possession, use or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

Copyright Notice

© Copyright 2011-2016 Hewlett Packard Enterprise Development, LP

Follow this link to see a complete statement of copyrights and acknowledgements:

<https://www.protect724.hpe.com/docs/DOC-13026>

Support

Contact Information

Phone	A list of phone numbers is available on the HPE Security ArcSight Technical Support Page: https://softwaresupport.hp.com/documents/10180/14684/esp-support-contact-list
Support Web Site	https://softwaresupport.hpe.com
Protect 724 Community	https://www.protect724.hpe.com

Contents

ArcSight Logger Forwarding Connector for HPE NNMi	4
About HPE ArcSight Logger and HPE NNMi	4
Sending Events From Logger to NNMi	5
Installing the Connector	5
Configure for HPE Network Node Manager (NNMi)	8
NNMi Console	9
Logger Forwarders	11
Creating a Forwarder to Forward Events	11
Appendix A: Supported Cisco Router, HPE H3C, and HPE ProCurve Sub-Messages	13
Cisco Router Sub-messages	13
HPE H3C Sub-messages	15
HPE ProCurve Sub-messages	16
Send Documentation Feedback	18

ArcSight Logger Forwarding Connector for HPE NNMi

This guide provides information on installing and configuring the ArcSight Logger Forwarding Connector for HPE NNMi on Windows, Linux and Solaris platforms. This Logger Forwarding Connector software supports **Logger 6.2, and 6.3, NNMi 9.20, patch 1** and **NNMi 10.0**.

See ["Supported Cisco Router, HPE H3C, and HPE ProCurve Sub-Messages" on page 13](#) for details on supported Cisco Router sub-messages.

Note the following:

- You must upgrade to HPE NNMi 9.20, patch 1 or later to be able to use the current Logger Forwarding Connector for HPE NNMi. If you have a previous version of HPE NNMi installed, the current Logger Forwarding Connector for HPE NNMi will not function.
- Use the latest version of the SmartConnector with the current Logger Forwarding Connector for NNMi. If you plan to process events from HPE ProCurve devices, you must also install the latest SmartConnector build.

Note: The following changes start with the next release:

- Windows and Linux 64-bit operating systems will be supported.
- Solaris operating system will no longer be supported.

About HPE ArcSight Logger and HPE NNMi

HPE ArcSight Logger is a log management solution that is optimized for extremely high event throughput, efficient long-term storage, and rapid data analysis. Logger receives and stores events; supports search, retrieval, and reporting; and can forward selected events. The HPE ArcSight Logger Forwarding Connector allows you to send these event logs from Logger to the HPE Network Node Manager (HPE NNMi).

HPE Network Node Manager (NNMi) provides continual network discovery using unified fault, availability, and performance monitoring. HPE NNMi enables network management teams to detect, locate, and diagnose faults and performance degradations of the network quickly, analyze the business and service impact of outages, and increase network staff efficiency and productivity.

Using the HPE ArcSight Logger Forwarding Connector and the HPE NNMi integration install, network staff can view syslog messages from Logger in the NNMi console.

Sending Events From Logger to NNMi

Logger sends events to the Logger Forwarding Connector using CEF Syslog, which then forwards the events to NNMi via SNMP. For Logger to send events to the Logger Forwarding Connector, a Logger forwarder must be created to send these events. For instructions on how to create a forwarder to send the events, see ["Creating a Forwarder to Forward Events" on page 11](#).

Installing the Connector

Before you install the connector, make sure that the ArcSight products with which the connectors will communicate have already been installed correctly (the ArcSight Logger, for example) and you have assigned appropriate privileges.

1. Download the HPE ArcSight executable for your operating system from **My Updates** on the HPE SSO site.
2. Start the HPE ArcSight Installer by running the executable.

Follow the installation wizard through the following folder selection tasks and installation of the core connector software:

Introduction

Choose Install Folder


Choose Install Set

Choose Shortcut Folder


Pre-Installation Summary

Installing...

3. Select **Add a Connector**.

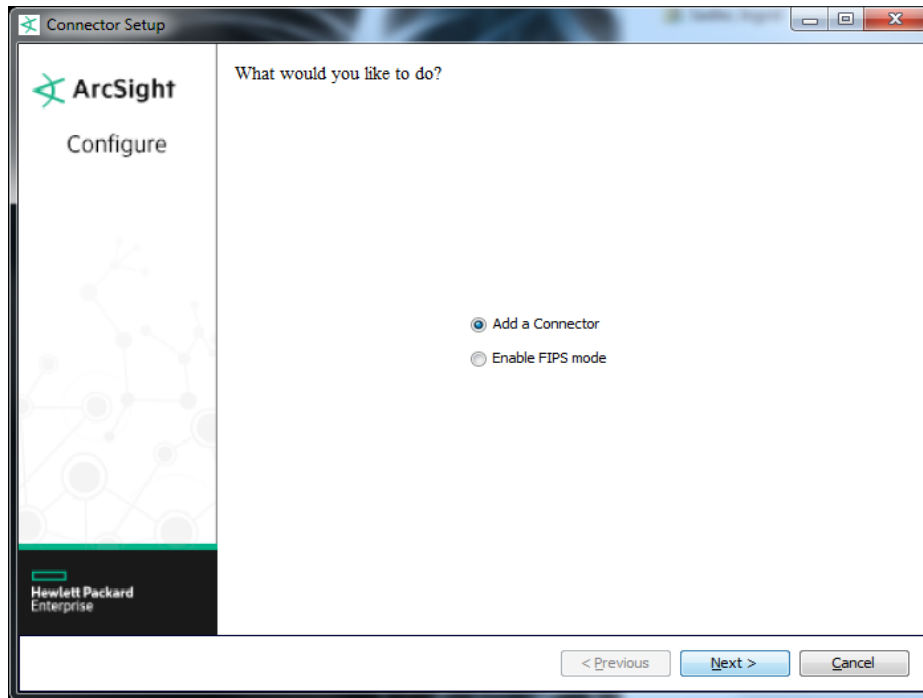

4. Click **Next**. **Logger to NNMI** is selected by default.
5. Click **Next**. Enter the Logger information.

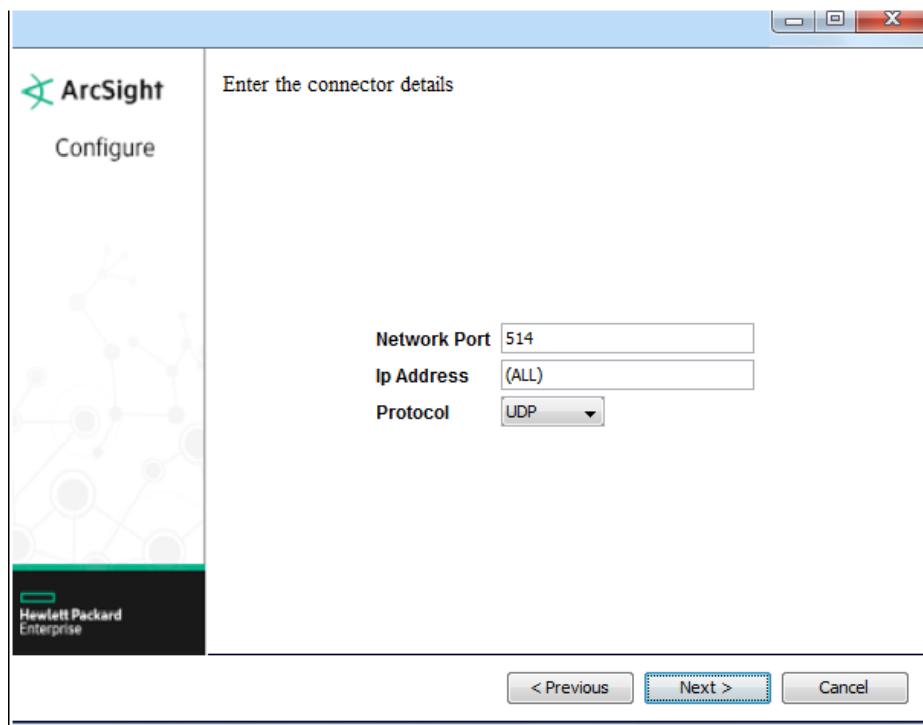

Parameter	Description
Network Port	514 or another port that matches the Receiver (the port to which the Forwarding Connector sends events)
IP Address	IP or host name of the Logger
Protocol	UDP or Raw TCP Note: Whichever protocol you choose, it must match that of the forwarder type chosen during Logger Forwarder configuration.

- Click **Next**. **HPE NNMi** is selected by default.
- Click **Next**. Fill in the parameter information required for connector configuration.

The screenshot shows the 'ArcSight Configure' window with the 'Enter the destination parameters' dialog. The dialog has a list of parameters on the left and corresponding input fields on the right. The parameters and their values are: Host (127.0.0.1), Port (162), Version (SNMP_VERSION_2), Read Community(v2) (public), Write Community(v2) (public), Authentication Username(v3) (empty), Authentication Password(v3) (empty), Security Level(v3) (AuthNoPriv), Authentication Scheme(v3) (MD5), Privacy Password(v3) (empty), Context Engine Id(v3) (Privacy Password), and Context Name(v3) (empty). At the bottom, there are three buttons: '< Previous', 'Next >', and 'Cancel'.


Parameter	Description
Host	Enter the Host name or IP address of the NNMi device.
Port	Enter the port to be used by the adaptor to forward events. The default port is 162 . To determine if the trap port monitored by NNMi is other than the default, use the NNMi command: \$NnmInstallDir/bin/nmtrapconfig.ovpl -showProp See the <i>NNMI ArcSight Logger Integration Guide</i> , HPE ArcSight Logger chapter for details on HPE NNMi and Logger integration.
Version	Accept the default value of SNMP_VERSION_2 . SNMP_VERSION_3 is not available at this time.

Parameter	Description
Read Community(v2)	Enter the SNMP Read Community name.
Write Community(v2)	Enter the SNMP Write Community name.
Authentication Username(v3)	For use with SNMP v3. This is not available at this time.
Authentication Password(v3)	Enter the authentication password.
Security Level(v3)	The default value is AuthNoPriv
Authentication Scheme(v3)	The default value is MD5 .
Privacy Password(v3)	Enter the privacy password.
Context Engine Id(v3)	Enter the context engine.
Context name(v3)	Enter the context name.

- Click **Next**. Enter a name for the connector and provide other information identifying the connector's use in your environment.
- Click **Next**. Read the installation summary and click **Next**. If the summary is incorrect, click **Previous** to make changes.
- When the connector completes its configuration, click **Next**. The Wizard now prompts you to choose whether you want to run the connector as a process or as a service.
If you choose to run the connector as a service, the Wizard prompts you to define service parameters for the connector.
- Click **Next**. Choose **Exit**, to complete the connector installation, or choose **Continue**, to continue to make connector modifications. Click **Next** to exit or continue.

Configure for HPE Network Node Manager (NNMi)

Add new node for the VM with the IP address where you want to receive trap.

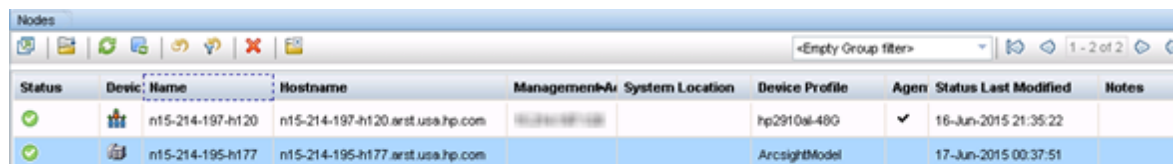

Status	Device Name	Hostname	Management IP	System Location	Device Profile	Agent	Status	Last Modified	Notes
✓	n15-214-197-h120	n15-214-197-h120.arst.usa.hp.com	10.128.1.120		hp2910ai-480	✓	16-Jun-2015 21:35:22		
✓	n15-214-195-h177	n15-214-195-h177.arst.usa.hp.com			ArcsightModel		17-Jun-2015 00:37:51		

NNMi Console

These modules are automatically filled in the NNMi Console:

Syslog Message Configurations										
Name	Enabled	Root Cause	Deduplication Enabled	Rate Enabled	Severity	Category	Family	Author	Message Format	
ARP/3/ROUTECONFLICT	✓	-	✓	-	Warning	Network	HP ArcSight	HP ArcSight	\$1.3.6.1.4.1.11937.1.42.1.3.1: \$1.3.6.1.4.1.11937.1.42.1.3.2	
ARP/5/ARP_DUPVRRIP	✓	-	✓	-	Warning	Network	HP ArcSight	HP ArcSight	\$1.3.6.1.4.1.11937.1.42.1.3.1: \$1.3.6.1.4.1.11937.1.42.1.3.2	
BFD/5/BFD_CHANGE_FSM	✓	-	✓	-	Warning	Network	HP ArcSight	HP ArcSight	\$1.3.6.1.4.1.11937.1.42.1.3.1: \$1.3.6.1.4.1.11937.1.42.1.3.2	
BGP-5-ADJCHANGE	✓	-	✓	-	Information	Network	HP ArcSight	HP ArcSight	\$1.3.6.1.4.1.11937.1.42.1.3.1: \$1.3.6.1.4.1.11937.1.42.1.3.2	
BGP/5/BGP_RECHED_THRESHOLD	✓	-	✓	-	Warning	Network	HP ArcSight	HP ArcSight	\$1.3.6.1.4.1.11937.1.42.1.3.1: \$1.3.6.1.4.1.11937.1.42.1.3.2	
CDP-4-DUPLEX_MISMATCH	✓	-	✓	-	Warning	Network	HP ArcSight	HP ArcSight	\$1.3.6.1.4.1.11937.1.42.1.3.1: \$1.3.6.1.4.1.11937.1.42.1.3.2	
CFM/5/CFM_SAVECONFIG_SUCCESS	✓	-	✓	-	Information	Network	HP ArcSight	HP ArcSight	\$1.3.6.1.4.1.11937.1.42.1.3.1: \$1.3.6.1.4.1.11937.1.42.1.3.2	
DEV/4/BOARD_LOADING	✓	-	✓	-	Warning	Network	HP ArcSight	HP ArcSight	\$1.3.6.1.4.1.11937.1.42.1.3.1: \$1.3.6.1.4.1.11937.1.42.1.3.2	
DEV/4/FAN_FAILED	✓	-	✓	-	Warning	Network	HP ArcSight	HP ArcSight	\$1.3.6.1.4.1.11937.1.42.1.3.1: \$1.3.6.1.4.1.11937.1.42.1.3.2	
DEV/4/FAN_RECOVERED	✓	-	✓	-	Information	Network	HP ArcSight	HP ArcSight	\$1.3.6.1.4.1.11937.1.42.1.3.1: \$1.3.6.1.4.1.11937.1.42.1.3.2	
DEV/4/LOAD_FINISHED	✓	-	✓	-	Information	Network	HP ArcSight	HP ArcSight	\$1.3.6.1.4.1.11937.1.42.1.3.1: \$1.3.6.1.4.1.11937.1.42.1.3.2	

See ["Supported Cisco Router, HPE H3C, and HPE ProCurve Sub-Messages"](#) on [page 13](#) for a complete list of supported sub-messages.

When events are sent from Forwarding Connector to NNMi, only events which contain attribute **mnemonic**, shown below, are parsed in **syslog message** incident.

```
CEF:0[HP][H3C][4800G][WROAM_ROAM_OUT_FAILED][WROAM_ROAM_OUT_FAILED][Medium]
eventId=809 msg=Client 001c-bf93-6f44, Failed to roam: Maximum roam-out clients reached.
rawEvent=Sep 6 11:15:17 hostname 2000 4800G %%10WROAM/4/WROAM_ROAM_OUT_FAILED:Client
001c-bf93-6f44, Failed to roam: Maximum roam-out clients reached. catdt=Switch art=1436623052291
cat=WLAN Roaming deviceSeverity=4 rt=1410027317000 cs1=2000
cs2=WROAM/4/WROAM_ROAM_OUT_FAILED cs3=10 cs1Label=Manufacturer cs2Label=Message Name
cs3Label=Syslog Version cs6Label=Group cn2Label=Slot ID cn3Label=VLAN ID ahost=agilis50-
bn.ARCPARTNERS.COM agt=15.215.8.66 agentZoneURI=/All Zones/ArcSight System/Public Address Space
Zones/Hewlett-Packard Company av=7.1.4.0.0 atz=America/Los Angeles
aid=3TQ1ffU4BABCAmXwIRKx8A\=- at=syslog dvchost=hostname dtz=America/Los Angeles
deviceFacility=WROAM cefVer=0.1 ad.message=Client 001c-bf93-6f44, Failed to roam: Maximum roam-
out clients reached. ad.mnemonic=WROAM/4/WROAM_ROAM_OUT_FAILED
```

Incidents for these valid events would be shown in the incident view.

The screenshot shows the Syslog Messages interface. On the left is a navigation pane with options like Dashboards, Incident Management, Topology Maps, Monitoring, Troubleshooting, Inventory, Management Mode, Incident Browsing, and SNMP Traps. The main area displays a table of Syslog Messages with columns: Severity, Lifecycle, Last Occurrence, Source Node, Source Object, Category, Family, Correlation, Message, and Notes. One incident is highlighted in blue.

Severity	Lifecycle	Last Occurrence	Source Node	Source Object	Category	Family	Correlation	Message	Notes
Info	Open	10/01/2015 01:08:40	none	10.208.255.138	CFM	CFM	CFM	CFM5/CFM_SAVECONFIG_SUCCESSFULLY: -D	
Info	Open	10/01/2015 01:08:40	none	10.208.255.138	NTP	NTP	NTP	NTP5/NTP_SOURCE_LOST: -DevIP 10.208.255.1	
Info	Open	10/01/2015 01:08:40	none	10.54.250.254	OSPF	OSPF	OSPF	OSPF5/OSPF_NBR_CHG: -DevIP 148.90.208.23	
Info	Open	10/01/2015 01:08:40	none	none	DEV	DEV	DEV	DEV5/BOARD_REMOVED: Board is removed	
Info	Open	10/01/2015 01:08:40	none	none	DEV	DEV	DEV	DEV5/BOARD_STATE_FAULT: Board state of	
Info	Open	10/01/2015 01:08:40	none	none	VRRP	VRRP	VRRP	VRRP5/VRRP_STATUS_CHANGE: -DevIP 128.2	
Info	Open	10/01/2015 01:08:40	none	none	MSTP	MSTP	MSTP	MSTP5/MSTP_RPDU_RECEIVE_EXPIRY: -DevIP	
Info	Open	10/01/2015 01:08:40	none	none	OPT	OPT	OPT	OPTMOD4/MODULE_IN: -DevIP 161.14.192.121	
Info	Open	10/01/2015 01:08:40	none	10.54.250.1	OSPF	OSPF	OSPF	OSPF5/OSPF_LAST_NBR_DOWN: -DevIP 148.9	
Info	Open	10/01/2015 01:08:40	none	none	ARP	ARP	ARP	ARP5/ARP_DUPVRRP: IP address 1.1.1.1 con	
Info	Open	10/01/2015 01:08:40	none	80.1.1.1	ARP	ARP	ARP	ARP3/ROUTECONFLICT: Route conflict found, F	
Info	Open	10/01/2015 01:08:40	none	none	BFD	BFD	BFD	BFD5/BFD_CHANGE_FSM: Sess[172.16.25.19]	

Below the table, there is an 'Analysis' section for the selected incident. It includes an 'Incident Summary' and a 'Details' section.

Incident Summary: OSPF5/OSPF_NBR_CHG

Message: OSPF5/OSPF_NBR_CHG: -DevIP 148.90.208.23; OSPF 1293 Neighbor 10.54.250.254(Vlan-interface1245) from Full to Down.

Severity: Minor

Lifecycle State: Registered

RCA Active: false

Source Object: 10.54.250.254 (Configuration Item)

Created/Opened: 11/07/2015 07:06 SA (Open for 2,8 days)

Details:

- 1.3.6.1.4.1.11937.1.1 (asn_octetstring) 19
- 1.3.6.1.4.1.11937.1.46.10 (asn_octetstring)
- 1.3.6.1.4.1.11937.1.16 (asn_octetstring) Jan 10 01:08:40 n100-h008 2000 4800G %:100SPF5/OSPF_NBR_CHG: -DevIP 148.90.208.23; OSPF 1293 Neighbor 10.54.250.254(Vlan-interface1245) from Full to Down.
- 1.3.6.1.4.1.11937.1.46.5 (asn_octetstring) OSPF_NBR_CHG
- 1.3.6.1.4.1.11937.1.46.4 (asn_octetstring) 10 Jan 2015 01:08:40 PST
- 1.3.6.1.4.1.11937.1.46.33 (asn_octetstring) HP
- 1.3.6.1.4.1.11937.1.46.34 (asn_octetstring) H3C

Detail of an incident:

The screenshot shows the 'Incident' detail view. It includes a 'Basics' section with fields for Message, Severity, Priority, Lifecycle State, Source Node, Source Object, and Assigned To. The 'Notes' section is also visible.

Basics:

- Message:** DEV4/FAN_RECOVERED: -Chassis 2-Slot 0;; Chassis 2 Fan 1 recovered.
- Severity:** Normal
- Priority:** None
- Lifecycle State:** Closed
- Source Node:** none
- Source Object:** none
- Assigned To:** [Dropdown menu]

Notes:

[Text area for notes]

On the right, there is a 'Custom Attributes' section. It includes a table with columns: Name, Type, and Value.

Name	Type	Value
1.3.6.1.4.1.11937.1.1	asn_octetst	10
1.3.6.1.4.1.11937.1.46.10	asn_octetst	
1.3.6.1.4.1.11937.1.16	asn_octetst	Jan 10 01:08:40 n100-h008 2000 4800G %:100SPF5/OSPF_NBR_CHG: -DevIP 148.90.208.23; OSPF 1293 Neighbor 10.54.250.254(Vlan-interface1245) from Full to Down.
1.3.6.1.4.1.11937.1.46.5	asn_octetst	FAN_RECOVERED
1.3.6.1.4.1.11937.1.46.4	asn_octetst	10 Jan 2015 01:08:40 PST
1.3.6.1.4.1.11937.1.46.33	asn_octetst	HP
1.3.6.1.4.1.11937.1.46.34	asn_octetst	H3C
1.3.6.1.4.1.11937.1.46.1	asn_octetst	
1.3.6.1.4.1.11937.1.46.2	asn_octetst	4
1.3.6.1.4.1.11937.1.42.1.1.1	asn_octetst	mnemonic
1.3.6.1.4.1.11937.1.42.1.3.1	asn_octetst	DEV4/FAN_RECOVERED
1.3.6.1.4.1.11937.1.42.1.1.2	asn_octetst	message

At the bottom, there is a status bar showing: Updated: 11/07/15 08:13:22 AM Total: 21 Selected: 0 Filter: OFF Auto refresh: On

Logger Forwarders

Logger **Forwarders** allow you to send all events, or events which match a particular filter, to another destination, in this instance to the Logger Forwarding Connector for HPE NNMi. For more detailed information on Logger Forwarders, see the *ArcSight Logger Administrator's Guide*.

Note: You cannot configure a Logger Forwarder to send data to a destination on the same system.

Logger forwarding uses several forwarder types, but the Logger Forwarding Connector operates with UDP and TCP forwarder types only.

- **UDP Forwarders** forward events as User Datagram Protocol messages, such as Syslog format datagrams.
- **TCP Forwarders** forward events as Transmission Control Protocol messages.




Creating a Forwarder to Forward Events


In order to successfully forward events from Logger to NNMi, a Logger Forwarder must be created. To do so, complete the following steps in the Logger web application.


1. Click **Configuration** from the top-level menu bar.
2. Click **Event Input/Output** in the left panel.
3. Click the **Forwarder** tab, then click **Add**. The **Add Forwarder** page appears.
4. Enter a name for the new forwarder and choose either “UDP Forwarder” or “TCP Forwarder”.

Caution: Whichever forwarder type you choose, it must match that of the SmartConnector protocol and port chosen during installation.

5. Click **Next**.
6. The **Edit Forwarder** page appears.
7. Within the **Query** field, create a query to filter the events sent to NNMi, or leave the default, **NONE**, to send all events.
8. Continue to fill in the remaining parameters, ensuring that the **Ip/Host** field contains the correct Logger Forwarding Connector IP address and that the **Port** number matches that of the connector.
9. Click **Save**. The following page appears.

<div>Add</div>								
Name	Type	IP/Host	Port	Query				
CHTCTCFWD	TCP Forwarder	10.0.202.116	515	NONE				

10. New forwarders are initially disabled, so click the disabled icon () to enable the new forwarder.



The forwarder is now enabled.

Note: To create a specific filter for **NNMi**, refer to the HPE NNMi documentation.

Tip: Wait a few minutes after enabling a forwarder before disabling it. Likewise, wait before enabling a forwarder that has just been disabled. Background tasks initiated by enabling or disabling a forwarder can produce unexpected results if they are interrupted.

Appendix A: Supported Cisco Router, HPE H3C, and HPE ProCurve Sub-Messages

This appendix lists Cisco Router, HPE H3C, and HPE ProCurve sub-messages, for which additional mappings were provided in this release.

Cisco Router Sub-messages

The following Cisco Router sub-messages are provided:

- BGP-5-ADJCHANGE
- CDP-4-DUPLEX_MISMATCH
- DTP-3-NONTRUNKPORTFAIL
- DTP-3-TRUNKPORTFAIL
- DTP-5-NONTRUNKPORTON
- DTP-5-TRUNKPORTCHG
- DTP-5-TRUNKPORTON
- FR-5-DLCICHANGE
- LINEPROTO-5-UPDOWN
- LINK-3-UPDOWN
- STANDBY-3-DUPADDR
- LINK-4-ERROR
- PAGP-5-PORTFROMSTP
- PAGP-5-PORTTOSTP
- PORT_SECURITY-2-PSECURE_VIOLATION_VLAN
- SNMP-5-MODULETRAP
- SPANTREE-5-PORTLISTEN
- SPANTREE-5-ROOTCHANGE

- SPANTREE-6-PORTFWD
- SPANTREE-6-PORTLISTEN
- STACKMGR-6-MASTER_ELECTED
- STACKMGR-6-MASTER_READY
- STACKMGR-6-STACK_LINK_CHANGE
- STANDBY-6-STATECHANGE
- SYS-3-MOD_CFGMISMATCH1
- SYS-3-MOD_CFGMISMATCH2
- SYS-3-MOD_CFGMISMATCH3
- SYS-3-MOD_CFGMISMATCH4
- SYS-3-PKTBUFFAD
- SYS-3-PORT_COLL
- SYS-3-PORT_COLLDIS
- SYS-3-PORT_IN_ERRORS
- SYS-3-PORT_RUNTS
- SYS-4-SYS_LCPERR4
- SYS-5-MOD_INSERT
- SYS-5-MOD_OK
- SYS-5-MOD_REMOVE
- SYS-5-MOD_RESET
- SYS-5-RELOAD
- SYS-5-RESTART
- SYS-5-SYS_LCPERR5

HPE H3C Sub-messages

The following HPE H3C sub-messages are provided:

- CFM/5/CFM_SAVECONFIG_SUCCESSFULLY
- NTP/5/NTP_SOURCE_LOST
- DEV/4/FAN_FAILED
- OSPF/5/OSPF_NBR_CHG
- DEVM/3/BOARD_REMOVED
- DEV/4/FAN_RECOVERED
- DEVM/2/BOARD_STATE_FAULT
- VRRP/6/VRRP_STATUS_CHANGE
- DEV/4/POWER_FAILED
- DEV/4/POWER_RECOVERED
- MSTP/5/MSTP_BPDU_RECEIVE_EXPIRY
- OPTMOD/4/MODULE_IN
- OSPF/6/OSPF_LAST_NBR_DOWN
- ARP/5/ARP_DUPVRRPIP
- ARP/3/ROUTECONFLICT
- BFD/5/BFD_CHANGE_FSM
- BGP/5/BGP_RECHED_THRESHOLD
- DEV/4/BOARD_LOADING
- DEV/4/LOAD_FINISHED
- DEVM/2/POWER_FAILED
- DEVM/5/POWER_RECOVERED
- DEVM/3/RPS_ABSENT
- DEVM/5/RPS_NORMAL
- DEVM/5/SYSTEM_REBOOT

- DEV/4/POWER_ABSENT
- DEV/4/SYSTEM_REBOOT
- LDP/5/LDP_SESSION_DOWN
- OPTMOD/5/CHKSUM_ERR
- OPTMOD/5/IO_ERR
- OPTMOD/5/MOD_ALM_OFF
- OPTMOD/5/MOD_ALM_ON
- OPTMOD/4/MODULE_OUT
- OPTMOD/3/TYPE_ERR
- PIM/5/PIM_NBR_DOWN
- STM/4/LINK_STATUS_CHANGE
- STM/3/STM_LINK_STATUS_DOWN
- STM/6/STM_LINK_STATUS_UP

HPE ProCurve Sub-messages

The following HPE ProCurve sub-messages are provided:

- RMON_PMGR_PORT_UP
- RMON_CHASSIS_FAN_STATUS
- RMON_STP_NEW_ROOT
- RMON_LACP_DYNAMIC_TRUNK_OFF_LINE
- RMON_LACP_DYNAMIC_TRUNK_ON_LINE
- RMON_LACP_ERROR_CONDITION_BLOCK
- RMON_POEMGR_PD_DENIED_POWER
- RMON_POEMGR_PD_OVERCURRENT
- RMON_POEMGR_INTERNAL_50V_FAULT
- RMON_BOOT_CRASH_RECORD0
- RMON_BOOT_CRASH_RECORD1

- RMON_BOOT_NO_CRASH_RECORD
- RMON_BOOT_SELFTEST_FAILURE
- RMON_SSH_DISABLED
- RMON_SSH_ENABLED
- RMON_CHASSIS_POWER_STATUS
- RMON_CHASSIS_HEARTBEAT_FAILURE

Send Documentation Feedback

If you have comments about this document, you can [contact the documentation team](#) by email. If an email client is configured on this system, click the link above and an email window opens with the following information in the subject line:

Feedback on Configuration Guide (Logger Forwarding Connector for HPE NNMi 7.3.0.7837.0)

Just add your feedback to the email and click send.

If no email client is available, copy the information above to a new message in a web mail client, and send your feedback to arc-doc@hpe.com.

We appreciate your feedback!

Documentation Revision History

Date	Product Version	Description
08/30/2016	7.3.0.7837.0	HPE branding. Updated supported Logger versions.
02/15/2016	7.1.7.7609.0	Support for version 10.0. Installation support for Windows 2012 R2. Support for RHEL 7.1. Support for 64-bit on Linux and Windows platforms. Support for Logger 6.0.
09/28/2012	5.2.3.6287.0	Added support for selected HP H3C and HP ProCurve submessages. Added support for HP NNMi 9.20, patch 1 and a new connector installation wizard. Event data is forwarded as CEF Syslog from Logger to the Logger Forwarding Connector for HP NNMi. The parsing is now enabled only in the corresponding release of the SmartConnectors. Forwarding events from supported devices such as Cisco Router, HP H3C, and HP ProCurve directly to the Logger Forwarding Connector without SmartConnectors or Logger is not a supported configuration.
05/15/2012	5.2.1.6206.0	Added support for selected Cisco Router sub-messages.
11/15/2011	5.1.7.6081.0	Added support for JRE 1.6.0_26.